## SIEMENS

## Data sheet

## 3RB3016-1PB0



Overload relay 1...4 A Electronic For motor protection Size S00, Class 10E Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

product brand name	SIRIUS
product designation	solid-state overload relay
product type designation	3RB3
General technical data	
size of overload relay	S00
size of contactor can be combined company-specific	S00
power loss [W] for rated value of the current at AC in hot operating state	0.1 W
per pole	0.03 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	300 V
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	300 V
<ul> <li>between main and auxiliary circuit</li> </ul>	600 V
<ul> <li>between main and auxiliary circuit</li> </ul>	690 V
shock resistance	15g / 11 ms
• acc. to IEC 60068-2-27	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 9g / 11 ms
vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s²; 10 cycles
thermal current	4 A
type of protection according to ATEX directive 2014/34/EU	Ex II (2) G [Ex e] [Ex d] [Ex px] ; Ex II (2) D [Ex t] [Ex p]
certificate of suitability according to ATEX directive 2014/34/EU	PTB 09 ATEX 3001
reference code acc. to IEC 81346-2	F
Substance Prohibitance (Date)	01.10.2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
<ul> <li>during storage</li> </ul>	-40 +80 °C
during transport	-40 +80 °C
temperature compensation	-25 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	1 4 A
operating voltage	

rated value	690 V
operating frequency rated value	50 60 Hz
operational current rated value	4 A
operating power	
• for 3-phase motors at 400 V at 50 Hz	0.37 1.5 kW
• for AC motors at 500 V at 50 Hz	0.37 2.2 kW
• for AC motors at 690 V at 50 Hz	0.55 3 kW
Auxiliary circuit	0.00 0
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	_ integrated 1
note	for contactor disconnection
number of NO contacts for auxiliary contacts <ul> <li>note</li> </ul>	
number of CO contacts for auxiliary contacts	for message "tripped" 0
operational current of auxiliary contacts at AC-15	
	4 A
• at 24 V	
• at 110 V	4 A 4 A
• at 120 V	
• at 125 V	4 A 2 A
• at 230 V	3 A
operational current of auxiliary contacts at DC-13	0.4
• at 24 V	2 A
• at 60 V	0.55 A
• at 110 V	0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A
Protective and monitoring functions	
trip class	CLASS 10E
design of the overload release	electronic
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
<ul> <li>at 480 V rated value</li> </ul>	4 A
• at 600 V rated value	4 A
contact rating of auxiliary contacts according to UL	B600 / R300
Short-circuit protection	
design of the fuse link	
<ul> <li>for short-circuit protection of the main circuit</li> </ul>	
<ul> <li>— with type of coordination 1 required</li> </ul>	gG: 35 A, RK5: 15 A
<ul> <li>— with type of assignment 2 required</li> </ul>	gG: 20 A
<ul> <li>for short-circuit protection of the auxiliary switch</li> </ul>	fuse gG: 6 A
required	
Installation/ mounting/ dimensions	
mounting position	any
fastening method	Contactor mounting
height	79 mm
width	45 mm
depth	73 mm
Connections/ Terminals	
product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection	
<ul> <li>for main current circuit</li> </ul>	screw-type terminals
<ul> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
for main contacts	
— solid	1x (0.5 4 mm²), 2x (0.5 1.5 mm²), 2x (0.75 4 mm²)
— solid or stranded	1x (0,5 4 mm²), 2x (0,5 1,5 mm²), 2x (0,75 4 mm²)
<ul> <li>— finely stranded with core end processing</li> </ul>	1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²)

	s for main contacts		1x (20 12), 2x (20 12)				
	e conductor cross-sect	ions					
<ul> <li>for auxiliary co</li> </ul>							
— solid			1x (0.5 4 mm²), 2x (0.5	2.5 mm <sup>2</sup> )			
— solid or st	randed		1x (0.5 4 mm <sup>2</sup> ), 2x (0.5 2.5 mm <sup>2</sup> )				
	— finely stranded with core end processing		1x (0,5 4 mm <sup>2</sup> ), 2x (0,5 2,5 mm <sup>2</sup> ) 1x (0.5 2.5 mm <sup>2</sup> ), 2x (0.5 1.5 mm <sup>2</sup> )				
-	<ul> <li>at AWG cables for auxiliary contacts</li> </ul>		1x (0.5 2.5 mm <sup>-</sup> ), 2x (0.5 1.5 mm <sup>-</sup> ) 1x (20 14), 2x (20 14)				
tightening torque			17 (20 14), 27 (20 14)				
	ata with aarow type tormi	inclo	0.8 1.2 N·m				
	cts with screw-type termi		0.8 1.2 N·m				
	for auxiliary contacts with screw-type terminals     design of screwdriver shaft						
			Diameter 5 to 6 mm				
size of the screwdr	· ·		Pozidriv PZ 2				
-	d of the connection scr	ew	140				
for main contact			M3				
	and control contacts		M3				
Safety related data							
	on the front acc. to IEC		IP20				
touch protection or	the front acc. to IEC 6	0529	finger-safe, for vertical cont	act from the front			
Communication/ Pro	tocol						
type of voltage sup	ply via input/output lin	k master	No				
Electromagnetic com							
conducted interfere							
	cc. to IEC 61000-4-4		2 kV (power ports), 1 kV (si	gnal ports) correspond	Is to degree of severity		
<ul> <li>due to conduct</li> </ul>	tor-earth surge acc. to IE	C 61000-4-5	3 2 kV (line to earth) correspo	onds to degree of seve	erity 3		
<ul> <li>due to conduct 61000-4-5</li> </ul>	tor-conductor surge acc.	to IEC	1 kV (line to line) correspon	ds to degree of severi	ty 3		
<ul> <li>due to high-fre 4-6</li> </ul>	quency radiation acc. to	IEC 61000-	10 V in frequency range 0.7 kHz	15 to 80 MHz, modulat	ion 80 % AM with 1		
field-based interfere	ence acc. to IEC 61000-	-4-3	10 V/m				
electrostatic discha	arge acc. to IEC 61000-4	4-2	6 kV contact discharge / 8 k	V air discharge			
Display			Ŭ	5			
display version for sv	witching status						
			Slide switch				
Certificates/ approva			Slide switch	_			
Certificates/ approva			Slide switch				
Certificates/ approva General Product A	ls		Slide switch	EMC	For use in hazard- ous locations		
	ls	0		EMC			
	ls	(h		ЕМС			
	ls	(U) UL		EMC EMC RCM			
	ls	(U) u		EMC RCM			
General Product A	ls	U	EAC	EMC ECM			
General Product A	ls pproval	U		EMC ECM			
General Product A	ls pproval	Type Test Cer ates/Test Re	ERE Marine / Shipping	EMC ECM			
General Product A	Is pproval CCC Test Certificates Special Test Certific-		tific- port	EMC ECM	ous locations		
General Product A	Is pproval CCC Test Certificates Special Test Certific-		ERE Marine / Shipping	RCM			
General Product A	Is pproval CCC Test Certificates Special Test Certific-		tific- port	EMC ECM	ous locations		
General Product A	Is pproval CCC Test Certificates Special Test Certific-		tific- port	RCM	ous locations		
General Product A	Is pproval CCC Test Certificates Special Test Certific-		tific- port	RCM	ous locations		
General Product A	Is pproval CCC Test Certificates Special Test Certific-		tific- port	RCM	ous locations		
General Product A	Is pproval CCC Test Certificates Special Test Certific-		tific- port	RCM	ous locations		
General Product A	Is pproval CCC Test Certificates Special Test Certific-		tific- port	Image: Constraint of the constraint	ous locations		
General Product A	Is pproval CCC Test Certificates Special Test Certific- ate	ates/Test Re	tific- port	Image: Constraint of the constraint	ous locations		
General Product A	Is pproval CCC Test Certificates Special Test Certific-		tific- port	Image: Constraint of the constraint	ous locations		
General Product A	Is pproval CCC Test Certificates Special Test Certific- ate	ates/Test Re	tific- port	Image: Constraint of the constraint	ous locations		
General Product A	Is pproval CCC Test Certificates Special Test Certific- ate	ates/Test Re	tific- port	Image: Constraint of the constraint	ous locations		
General Product A	Is pproval CCC Test Certificates Special Test Certific- ate	ates/Test Re	tific- port	Image: Constraint of the constraint	ous locations		

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3016-1PB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3016-1PB0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RB3016-1PB0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RB3016-1PB0&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RB3016-1PB0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3016-1PB0&objecttype=14&gridview=view1



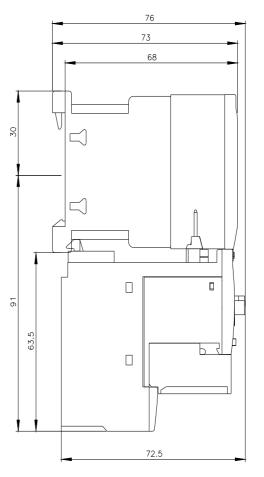

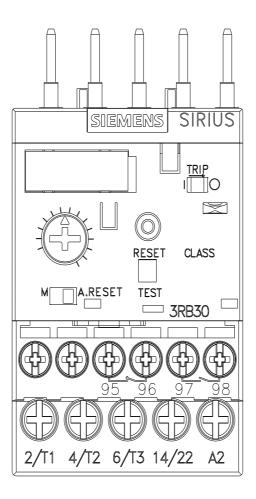

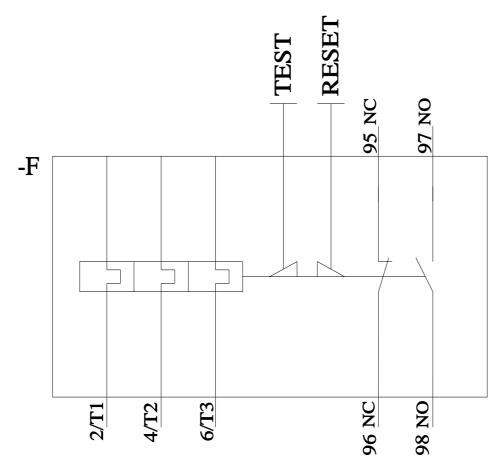

last modified:

12/15/2020 🖸