## **SIEMENS**

Data sheet 3RU2116-0EB0



Overload relay 0.28...0.40 A Thermal For motor protection Size S00, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S00
size of contactor can be combined company-specific	S00
power loss [W] for rated value of the current at AC in hot operating state	4.8 W
• per pole	1.6 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation in networks with grounded star point	
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V
between main and auxiliary circuit	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Blei - 7439-92-1
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-40 +70 °C
during storage	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	0.28 0.4 A
operating voltage	
• rated value	690 V
• at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	0.4 A
operational current at AC-3e at 400 V rated value	0.4 A

operating power	
• at AC-3	
— at 400 V rated value	0.09 kW
— at 500 V rated value	0.12 kW
— at 690 V rated value	0.18 kW
• at AC-3e	
— at 400 V rated value	0.09 kW
— at 500 V rated value	0.12 kW
— at 690 V rated value	0.18 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "Tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 110 V	3 A
• at 120 V	3 A
• at 125 V	3 A
• at 230 V	2 A
• at 400 V	1 A
• at 690 V	0.75 A
operational current of auxiliary contacts at DC-13	6.1671
• at 24 V	2 A
• at 60 V	0.3 A
• at 110 V	0.22 A
• at 125 V	0.22 A
• at 220 V	0.11 A
contact rating of auxiliary contacts according to UL	B600 / R300
Protective and monitoring functions	D000 / 1000
trip class	CLASS 10
trip class	thermal
design of the overload release	
design of the overload release	
UL/CSA ratings	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor	
UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value	0.4 A
UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value	
UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection	0.4 A
UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link	0.4 A 0.4 A
UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required	0.4 A
UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions	0.4 A 0.4 A fuse gG: 6 A, quick: 10 A
UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position	0.4 A 0.4 A fuse gG: 6 A, quick: 10 A
UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method	0.4 A 0.4 A fuse gG: 6 A, quick: 10 A any Contactor mounting
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height	0.4 A 0.4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width	0.4 A 0.4 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth	0.4 A 0.4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 76 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals	0.4 A 0.4 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals product component removable terminal for auxiliary and control circuit	0.4 A 0.4 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection	0.4 A 0.4 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit	0.4 A 0.4 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit	0.4 A 0.4 A  fuse gG: 6 A, quick: 10 A  any  Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit	0.4 A 0.4 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current	0.4 A 0.4 A  fuse gG: 6 A, quick: 10 A  any  Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit	0.4 A 0.4 A  fuse gG: 6 A, quick: 10 A  any  Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	0.4 A 0.4 A  fuse gG: 6 A, quick: 10 A  any  Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections • for main contacts	0.4 A 0.4 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals Top and bottom
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections • for main contacts — solid or stranded	0.4 A 0.4 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals Top and bottom  2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections • for main contacts  — solid or stranded — finely stranded with core end processing	0.4 A 0.4 A 0.4 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals Top and bottom  2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)

<ul> <li>for auxiliary contacts</li> </ul>	
<ul><li>— solid or stranded</li></ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>for AWG cables for auxiliary contacts</li> </ul>	2x (20 16), 2x (18 14)
tightening torque	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	0.8 1.2 N·m
<ul> <li>for auxiliary contacts with screw-type terminals</li> </ul>	0.8 1.2 N·m
design of screwdriver shaft	Diameter 5 6 mm
size of the screwdriver tip	Pozidriv PZ 2
design of the thread of the connection screw	
• for main contacts	M3
<ul> <li>of the auxiliary and control contacts</li> </ul>	M3
of the daxillary and control contacts	WO
Safety related data	
	50 FIT
Safety related data failure rate [FIT] with low demand rate according to SN	
Safety related data failure rate [FIT] with low demand rate according to SN 31920	50 FIT
Safety related data failure rate [FIT] with low demand rate according to SN 31920 MTTF with high demand rate	50 FIT
Failure rate [FIT] with low demand rate according to SN 31920  MTTF with high demand rate  IEC 61508  T1 value for proof test interval or service life according to	50 FIT 2 280 a
Safety related data failure rate [FIT] with low demand rate according to SN 31920 MTTF with high demand rate IEC 61508 T1 value for proof test interval or service life according to IEC 61508	50 FIT 2 280 a
Safety related data failure rate [FIT] with low demand rate according to SN 31920  MTTF with high demand rate IEC 61508 T1 value for proof test interval or service life according to IEC 61508  Electrical Safety	50 FIT 2 280 a 20 a
Safety related data failure rate [FIT] with low demand rate according to SN 31920 MTTF with high demand rate IEC 61508 T1 value for proof test interval or service life according to IEC 61508 Electrical Safety protection class IP on the front according to IEC 60529	50 FIT 2 280 a 20 a
Failure rate [FIT] with low demand rate according to SN 31920  MTTF with high demand rate  IEC 61508  T1 value for proof test interval or service life according to IEC 61508  Electrical Safety  protection class IP on the front according to IEC 60529  touch protection on the front according to IEC 60529	50 FIT 2 280 a 20 a

IIV

**General Product Approval** 





Confirmation





For use in hazardous locations

**Test Certificates** 

Marine / Shipping





Type Test Certificates/Test Report

Special Test Certificate





Marine / Shipping





LRS







**Miscellaneous** 

other

other

Confirmation

## Further information

Siemens has decided to exit the Russian market (see here).

 $\underline{\text{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}}$ 

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-0EB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-0EB0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-0EB0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RU2116-0EB0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-0EB0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-0EB0&objecttype=14&gridview=view1

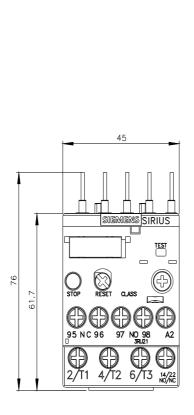

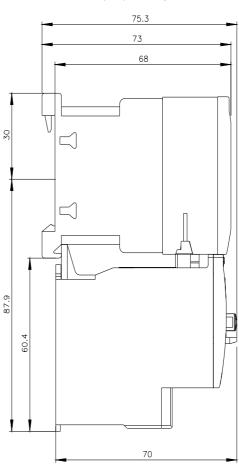

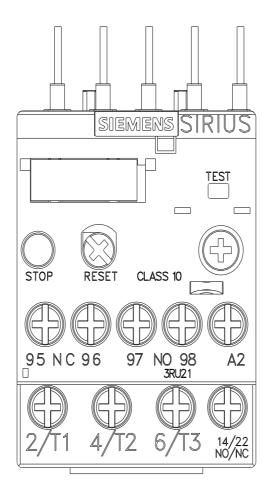

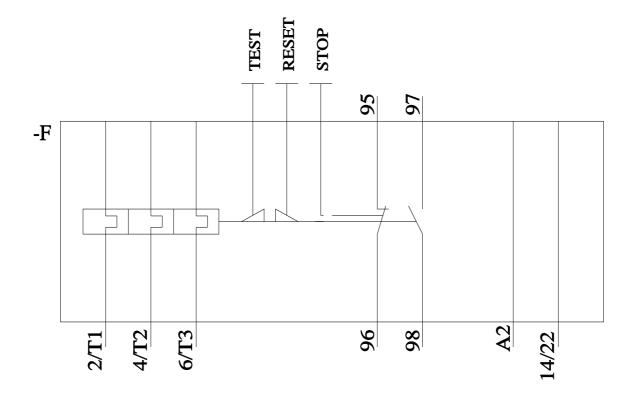

last modified: 9/5/2023 🖸