


product type designation

product description

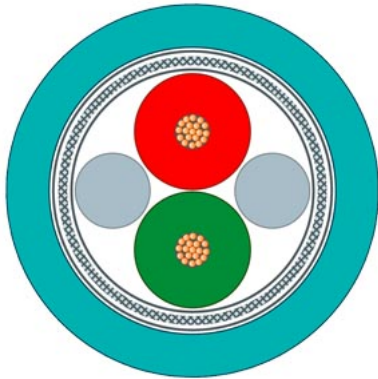

PROFIBUS Festoon Cable GP

Flexible bus cable (2-core), sold by the meter, unassembled

PROFIBUS FESTOON Cable GP for festoon suspension, 2-core shielded max. acceleration: 4 m/QS min. 5 million bending cycles, sold by the meter, Delivery unit: max. 1000 m, Minimum order quantity: 20 m

suitability for use

Specially for festoon attachment

cable designation

02YS (ST) CY 1 x 2 x 0,65/2,56 LI petrol FR

electrical data

attenuation factor per length

- at 9.6 kHz / maximum
- at 38.4 kHz / maximum
- at 4 MHz / maximum
- at 16 MHz / maximum

0.003 dB/m
0.004 dB/m
0.025 dB/m
0.049 dB/m

impedance

- rated value
- at 9.6 kHz
- at 38.4 kHz
- at 3 MHz ... 20 MHz

150 Ω
270 Ω
185 Ω
150 Ω

relative symmetrical tolerance

- of the characteristic impedance at 9.6 kHz
- of the characteristic impedance at 38.4 kHz
- of the characteristic impedance at 3 MHz ... 20 MHz

10 %
10 %
10 %

loop resistance per length / maximum

133 mΩ/m

shield resistance per length / maximum

19 Ω/km

insulation resistance coefficient

16000 GΩ·m

capacity per length / at 1 kHz

28 pF/m

operating voltage

- RMS value

80 V

mechanical data

number of electrical cores

2

design of the shield

Overlapped aluminum-clad foil, sheathed in a braided screen of tin-plated copper wires

type of electrical connection / FastConnect

No

outer diameter

- of inner conductor
- of the wire insulation
- of the inner sheath of the cable
- of cable sheath

0.67 mm
2.56 mm
5.8 mm
8 mm

symmetrical tolerance of the outer diameter / of cable sheath

0.3 mm

material

- of the wire insulation
- of cable sheath

polyethylene (PE)
PVC

color	
<ul style="list-style-type: none"> • of the insulation of data wires • of cable sheath 	red/green petrol
bending radius	
<ul style="list-style-type: none"> • with single bend / minimum permissible • with continuous bending 	30 mm 70 mm
tensile load / maximum	80 N
weight per length	64 kg/km
ambient conditions	
ambient temperature	
<ul style="list-style-type: none"> • during operation • during storage • during transport • during installation • note 	-40 ... +80 °C -40 ... +80 °C -40 ... +80 °C -40 ... +80 °C Electrical properties measured at 20 °C, tests according to DIN 47250 part 4 respectively DIN VDE 0472
fire behavior	flame resistant according to IEC 60332-3-24 (Category C)
class of burning behaviour / according to EN 13501-6	Eca
chemical resistance	
<ul style="list-style-type: none"> • to mineral oil • to grease • to water 	conditional resistance Conditional resistance conditional resistance
radiological resistance / to UV radiation	resistant
product features, product functions, product components / general	
product feature	
<ul style="list-style-type: none"> • halogen-free • silicon-free 	No Yes
standards, specifications, approvals	
UL/ETL listing / 300 V Rating	Yes; CMG / PLCT / Sun Res / Oil Res
UL/ETL style / 600 V Rating	Yes
certificate of suitability	
<ul style="list-style-type: none"> • EAC approval • CE marking 	Yes Yes
Marine classification association	
<ul style="list-style-type: none"> • American Bureau of Shipping Europe Ltd. (ABS) • French marine classification society (BV) • Det Norske Veritas (DNV) • Germanische Lloyd (GL) • Lloyds Register of Shipping (LRS) • Nippon Kaiji Kyokai (NK) • Polski Rejestr Statkow (PRS) 	No No No No No No No
reference code	
<ul style="list-style-type: none"> • acc. to IEC 81346-2 • according to IEC 81346-2:2019 	WG WGB
further information / internet-Links	
Internet-Link	
<ul style="list-style-type: none"> • to web page: selection aid TIA Selection Tool • to website: Industrial communication • to website: Industry Mall • to website: Information and Download Center • to website: Selection guide for cables and connectors • to website: Image database • to website: CAx-Download-Manager • to website: Industry Online Support 	http://www.siemens.com/tia-selection-tool http://www.siemens.com/simatic-net https://mall.industry.siemens.com http://www.siemens.com/industry/infocenter https://sie.ag/2QdlxcP http://automation.siemens.com/bilddb http://www.siemens.com/cax https://support.industry.siemens.com
last modified:	10/30/2021 