



Timing relay, multifunction 1 changeover contact, 2 functions (B, K) 7 time ranges (0.05 s...100 h) 24 V AC/DC at 50/60 Hz AC With LED, screw terminal

product brand name	SIRIUS
product designation	timing relay
design of the product	2 functions (B, K)
product type designation	3RP25
Substance Prohibittance (Date)	12.09.2014

**Electromagnetic compatibility**

EMC emitted interference acc. to IEC 61812-1	ambience A (industrial sector)
EMC immunity acc. to IEC 61812-1	corresponds to degree of severity 3

**Safety related data**

protection class IP on the front acc. to IEC 60529	IP20
--	------

**Certificates/ approvals**

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping	other
-------------------	-------



[Confirmation](#)

**Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RP2505-1AB30-0AC1>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP2505-1AB30-0AC1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RP2505-1AB30-0AC1>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RP2505-1AB30-0AC1&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RP2505-1AB30-0AC1&lang=en)

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RP2505-1AB30-0AC1/manual>

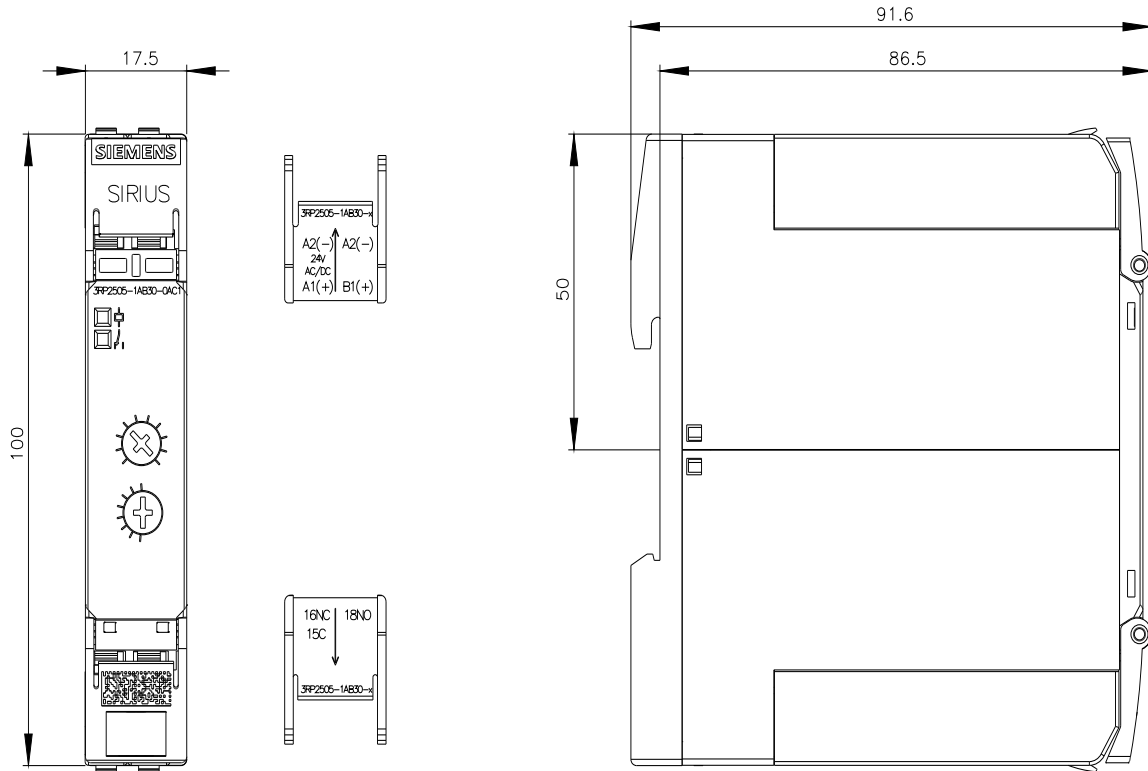

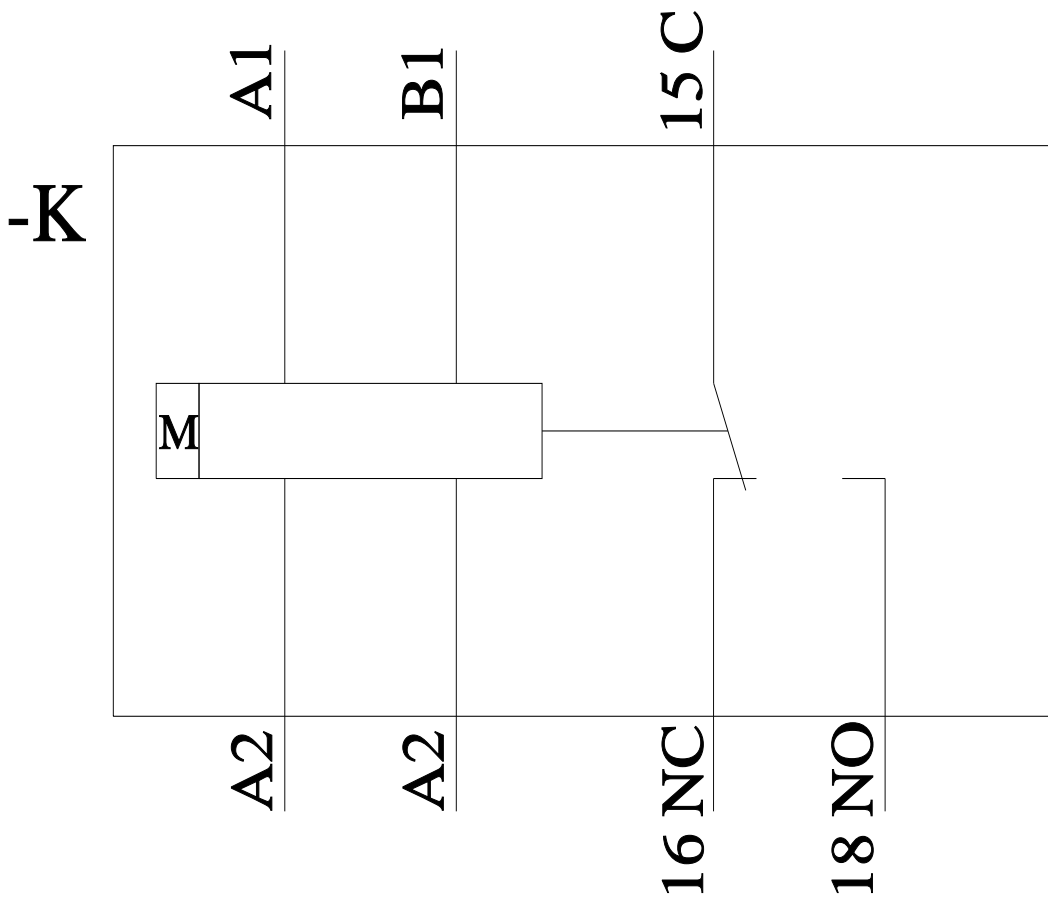

last modified:

8/24/2021 